





# YOUTH SHELTERS DOUBLE UPTON

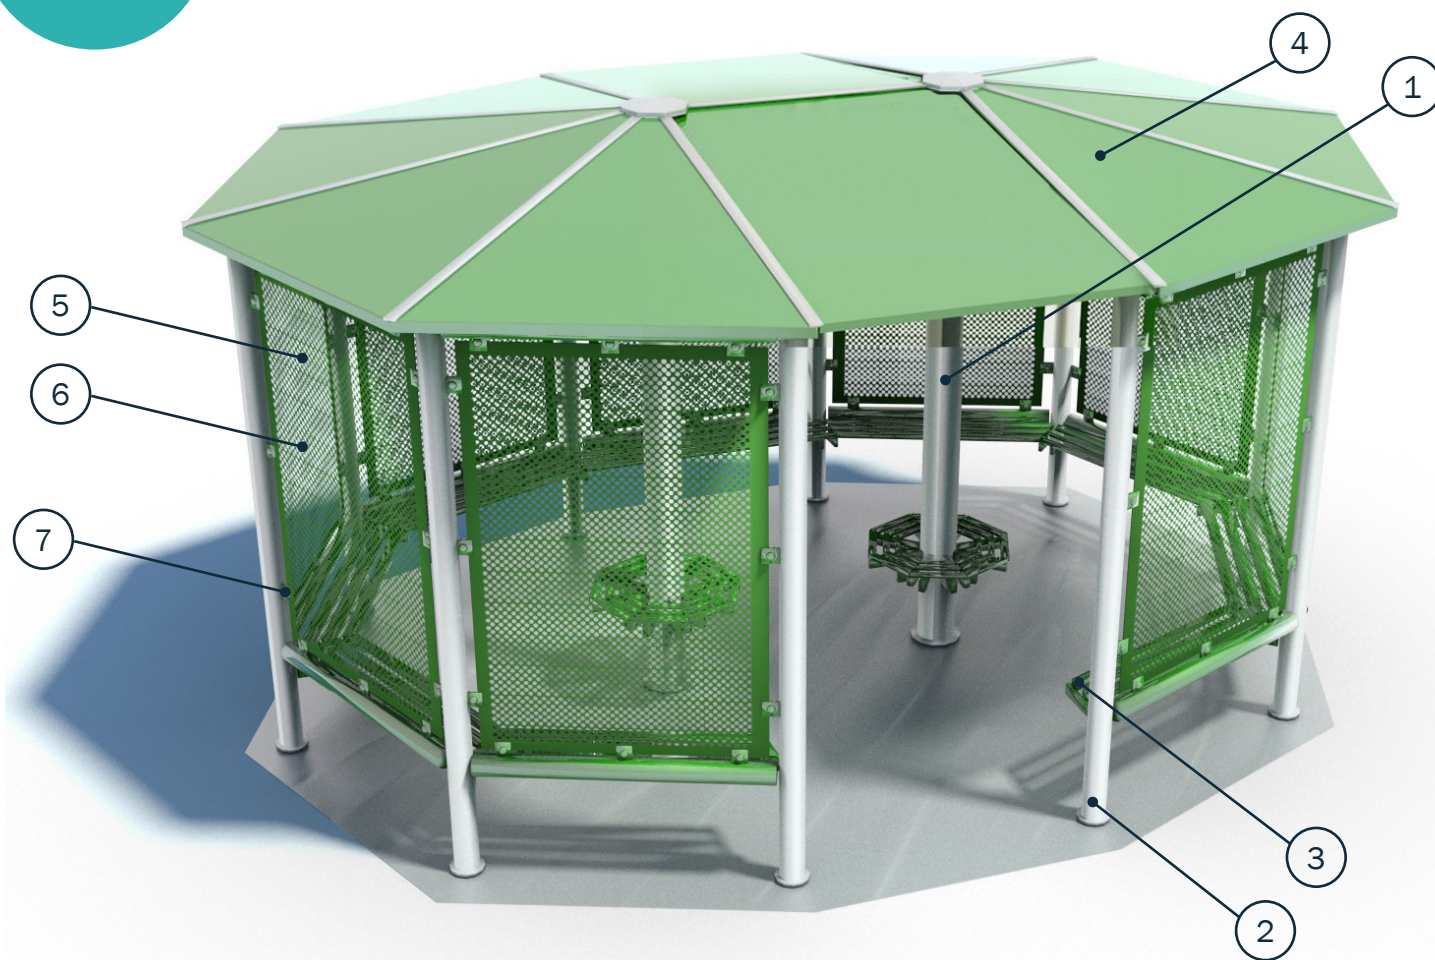


## TECHNICAL INFORMATION

1. Centre posts - 168mm diameter circular hollow section tube with a 5mm wall thickness
2. Outer posts - 114.3mm diameter circular hollow section tube and a 3.6mm wall thickness
3. Seating - Flat bar centre and outer seating
4. Roof - Decagonal shaped box section covered with 2mm thick galvanised plate
5. Panels - Your choice of;
  - Vertical 25mm x 3mm flat bar with horizontal twisted 6mm square bar
  - 2mm thick steel plate panel (as shown)
  - Perforated steel plate panel
6. Finishing - Hot dip galvanised to EN ISO 1461 by an ISO 9001 certified galvaniser and powder coated to BS EN 13438:2013. Available in any standard RAL colour of your choice
7. Fixings - High quality stainless steel security fixings covered with a durable vandal resistant plastic cover for safety and visual appeal throughout
8. Installation - Available fixed onto a concrete pad or surface mounted onto a steel base

SIDE ELEVATION



FRONT ELEVATION

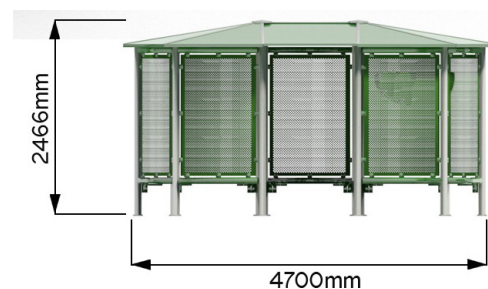

Do not scale from drawings. For illustration purposes only.